
Subject: Re: dual nic environment


Posted by [Vasily Tarasov](#) on Fri, 13 Oct 2006 05:31:36 GMT

[View Forum Message](#) <> [Reply to Message](#)

Hello,

If you're using venet device, than HN is used as a gateway for the VEs on these HN and you can picture that venet in VE is directly connected to venet on HN.

After these assumptions it's simple to perform almost any configuration. For example in you case we have:

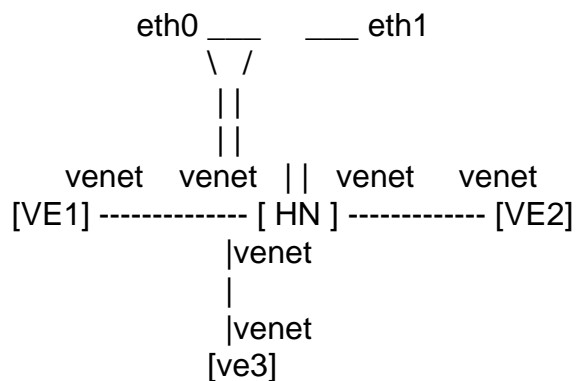

So the only thing you should do is proper routing on HN.

HTH,
vass.
