

---

Subject: [PATCH 0/2] dm-ioband: I/O bandwidth controller v0.0.4: Introduction  
Posted by [Ryo Tsuruta](#) on Thu, 24 Apr 2008 11:18:57 GMT  
[View Forum Message](#) <> [Reply to Message](#)

---

Hi everyone,

This is dm-ioband version 0.0.4 release.

Dm-ioband is an I/O bandwidth controller implemented as a device-mapper driver, which gives specified bandwidth to each job running on the same physical device.

Changes since 0.0.3 (5th February):

- Improve the performance when many processes are issuing I/Os simultaneously.
- Change the table format to fully support dmsetup table/load commands.  
The table format consists all configuration parameters.
- Port to linux-2.6.25.

An administration tool is available. It makes it easy to configure bandwidths of disk partitions.

You can download it and find the manual at

<http://people.valinux.co.jp/~kaizuka/dm-ioband/iobandctl/>

For more details, please refer to:

<http://people.valinux.co.jp/~ryov/dm-ioband/>

Thanks,  
Ryo Tsuruta

---

Containers mailing list  
[Containers@lists.linux-foundation.org](mailto:Containers@lists.linux-foundation.org)  
<https://lists.linux-foundation.org/mailman/listinfo/containers>

---

---

Subject: [PATCH 1/2] dm-ioband: I/O bandwidth controller v0.0.4: Source code and patch  
Posted by [Ryo Tsuruta](#) on Thu, 24 Apr 2008 11:21:44 GMT  
[View Forum Message](#) <> [Reply to Message](#)

---

Here is the patch of dm-ioband.

Based on 2.6.25

Signed-off-by: Ryo Tsuruta <[ryov@valinux.co.jp](mailto:ryov@valinux.co.jp)>

Signed-off-by: Hirokazu Takahashi <[taka@valinux.co.jp](mailto:taka@valinux.co.jp)>

```
diff -uprN linux-2.6.25.orig/drivers/md/dm-ioband-ctl.c linux-2.6.25/drivers/md/dm-ioband-ctl.c
--- linux-2.6.25.orig/drivers/md/dm-ioband-ctl.c 1970-01-01 09:00:00.000000000 +0900
```

```

+++ linux-2.6.25/drivers/md/dm-ioband-ctl.c 2008-04-24 19:44:08.000000000 +0900
@@ -0,0 +1,1036 @@
+/*
+ * Copyright (C) 2008 VA Linux Systems Japan K.K.
+ * Authors: Hirokazu Takahashi <taka@valinux.co.jp>
+ *          Ryo Tsuruta <ryov@valinux.co.jp>
+ *
+ * I/O bandwidth control
+ *
+ * This file is released under the GPL.
+ */
+#include <linux/module.h>
+#include <linux/init.h>
+#include <linux/bio.h>
+#include <linux/slab.h>
+#include <linux/workqueue.h>
+#include <linux/raid/md.h>
+#include "dm.h"
+#include "dm-bio-list.h"
+#include "dm-ioband.h"
+
+#define DM_MSG_PREFIX "ioband"
#define POLICY_PARAM_START 6
#define POLICY_PARAM_DELIM "=:"
+
+static LIST_HEAD(ioband_device_list);
/* to protect ioband_device_list */
+static DEFINE_SPINLOCK(ioband_devicelist_lock);
+
+#if LINUX_VERSION_CODE < KERNEL_VERSION(2,6,20)
+static void ioband_conduct(void *);
+#else
+static void ioband_conduct(struct work_struct *);
#endif
+
+static void ioband_hold_bio(struct ioband_group *, struct bio *);
+static struct bio *ioband_pop_bio(struct ioband_group *);
+static int ioband_set_param(struct ioband_group *, char *, char *);
+static int ioband_group_attach(struct ioband_group *, int, char *);
+static int ioband_group_type_select(struct ioband_group *, char *);
+
+long ioband_debug; /* just for debugging */
+
+static int policy_init(struct ioband_device *dp, char *name,
+          int argc, char **argv)
+{
+    struct policy_type *p;
+    int r;
+

```

```

+ for (p = dm_ioband_policy_type; (p->p_name); p++) {
+ if (!strcmp(name, p->p_name))
+ break;
+ }
+
+ dp->g_policy = p;
+ r = p->p_policy_init(dp, argc, argv);
+ if (!dp->g_hold_bio)
+ dp->g_hold_bio = ioband_hold_bio;
+ if (!dp->g_pop_bio)
+ dp->g_pop_bio = ioband_pop_bio;
+ return r;
+}
+
+static struct ioband_device *alloc_ioband_device(char *name, char *policy,
+ int io_throttle, int io_limit, int argc, char **argv)
+
+{
+ struct ioband_device *dp = NULL;
+ struct ioband_device *p;
+ struct ioband_device *new;
+ unsigned long flags;
+
+ new = kzalloc(sizeof(struct ioband_device), GFP_KERNEL);
+ if (!new)
+ goto try_to_find;
+
+ /*
+ * Prepare its own workqueue as generic_make_request() may potentially
+ * block the workqueue when submitting BIOS.
+ */
+ new->g_ioband_wq = create_workqueue("kioband");
+ if (!new->g_ioband_wq) {
+ kfree(new);
+ new = NULL;
+ goto try_to_find;
+ }
+
+ #if LINUX_VERSION_CODE < KERNEL_VERSION(2,6,20)
+ INIT_WORK(&new->g_conductor, ioband_conduct, new);
+ #else
+ INIT_WORK(&new->g_conductor, ioband_conduct);
+ #endif
+ INIT_LIST_HEAD(&new->g_groups);
+ INIT_LIST_HEAD(&new->g_list);
+ spin_lock_init(&new->g_lock);
+ new->g_io_throttle = io_throttle;
+ new->g_io_limit = io_limit;

```

```

+ new->g_issued = 0;
+ new->g_blocked = 0;
+ new->g_ref = 0;
+ new->g_flags = 0;
+ strlcpy(new->g_name, name, sizeof(new->g_name));
+ new->g_policy = NULL;
+ new->g_hold_bio = NULL;
+ new->g_pop_bio = NULL;
+ init_waitqueue_head(&new->g_waitq);
+
+try_to_find:
+ spin_lock_irqsave(&ioband_devicelist_lock, flags);
+ list_for_each_entry(p, &ioband_device_list, g_list) {
+ if (!strcmp(p->g_name, name)) {
+ dp = p;
+ break;
+ }
+ if (!dp && (new)) {
+ if (policy_init(new, policy, argc, argv) == 0) {
+ dp = new;
+ new = NULL;
+ list_add_tail(&dp->g_list, &ioband_device_list);
+ }
+ }
+ spin_unlock_irqrestore(&ioband_devicelist_lock, flags);
+
+ if (new) {
+ destroy_workqueue(new->g_ioband_wq);
+ kfree(new);
+ }
+
+ return dp;
+}
+
+static inline void release_ioband_device(struct ioband_device *dp)
+{
+ unsigned long flags;
+
+ spin_lock_irqsave(&ioband_devicelist_lock, flags);
+ if (!list_empty(&dp->g_groups)) {
+ spin_unlock_irqrestore(&ioband_devicelist_lock, flags);
+ return;
+ }
+ list_del(&dp->g_list);
+ spin_unlock_irqrestore(&ioband_devicelist_lock, flags);
+ destroy_workqueue(dp->g_ioband_wq);
+ kfree(dp);

```

```

+}
+
+static struct ioband_group *ioband_group_find(struct ioband_group *head,int id)
+{
+ struct ioband_group *p;
+ struct ioband_group *gp = NULL;
+
+ list_for_each_entry(p, &head->c_group_list, c_group_list) {
+ if (p->c_id == id || id == IOBAND_ID_ANY)
+ gp = p;
+ }
+ return gp;
+}
+
+static int ioband_group_init(struct ioband_group *gp,
+ struct ioband_group *head, struct ioband_device *dp, int id, char *param)
+{
+ unsigned long flags;
+ int r;
+
+ INIT_LIST_HEAD(&gp->c_list);
+ bio_list_init(&gp->c_blocked_bios);
+ gp->c_id = id; /* should be verified */
+ gp->c_blocked = 0;
+ memset(gp->c_stat, 0, sizeof(gp->c_stat));
+ init_waitqueue_head(&gp->c_waitq);
+ gp->c_flags = 0;
+
+ INIT_LIST_HEAD(&gp->c_group_list);
+
+ gp->c_banddev = dp;
+
+ spin_lock_irqsave(&dp->g_lock, flags);
+ if (head && ioband_group_find(head, id)) {
+ spin_unlock_irqrestore(&dp->g_lock, flags);
+ DMWARN("ioband_group: id=%d already exists.", id);
+ return -EEXIST;
+ }
+
+ dp->g_ref++;
+ list_add_tail(&gp->c_list, &dp->g_groups);
+
+ r = dp->g_group_ctr(gp, param);
+ if (r) {
+ list_del(&gp->c_list);
+ dp->g_ref--;
+ return r;
+ }

```

```

+
+ if (head) {
+   list_add_tail(&gp->c_group_list, &head->c_group_list);
+   gp->c_dev = head->c_dev;
+   gp->c_target = head->c_target;
+ }
+
+ spin_unlock_irqrestore(&dp->g_lock, flags);
+
+ return 0;
+}
+
+static inline void ioband_group_release(struct ioband_group *gp)
+{
+ struct ioband_device *dp = gp->c_banddev;
+
+ list_del(&gp->c_list);
+ list_del(&gp->c_group_list);
+ dp->g_ref--;
+ dp->g_group_dtr(gp);
+ kfree(gp);
+}
+
+static void ioband_group_destroy_all(struct ioband_group *gp)
+{
+ struct ioband_device *dp = gp->c_banddev;
+ struct ioband_group *group;
+ unsigned long flags;
+
+ spin_lock_irqsave(&dp->g_lock, flags);
+ while ((group = ioband_group_find(gp, IOBAND_ID_ANY)))
+   ioband_group_release(group);
+ ioband_group_release(gp);
+ spin_unlock_irqrestore(&dp->g_lock, flags);
+}
+
+static void ioband_group_stop(struct ioband_group *gp)
+{
+ struct ioband_device *dp = gp->c_banddev;
+ unsigned long flags;
+
+ spin_lock_irqsave(&dp->g_lock, flags);
+ set_group_down(gp);
+ spin_unlock_irqrestore(&dp->g_lock, flags);
+ queue_work(dp->g_ioband_wq, &dp->g_conductor);
+ flush_workqueue(dp->g_ioband_wq);
+}
+

```

```

+static void ioband_group_stop_all(struct ioband_group *head, int suspend)
+{
+ struct ioband_device *dp = head->c_banddev;
+ struct ioband_group *p;
+ unsigned long flags;
+
+ spin_lock_irqsave(&dp->g_lock, flags);
+ list_for_each_entry(p, &head->c_group_list, c_group_list) {
+ set_group_down(p);
+ if (suspend) {
+ set_group_suspended(p);
+ dprintk(KERN_ERR "iband suspend: gp(%p)\n", p);
+ }
+
+ }
+ set_group_down(head);
+ if (suspend) {
+ set_group_suspended(head);
+ dprintk(KERN_ERR "iband suspend: gp(%p)\n", head);
+ }
+ spin_unlock_irqrestore(&dp->g_lock, flags);
+ queue_work(dp->g_ioband_wq, &dp->g_conductor);
+ flush_workqueue(dp->g_ioband_wq);
+}
+
+static void ioband_group_resume_all(struct ioband_group *head)
+{
+ struct ioband_device *dp = head->c_banddev;
+ struct ioband_group *p;
+ unsigned long flags;
+
+ spin_lock_irqsave(&dp->g_lock, flags);
+ list_for_each_entry(p, &head->c_group_list, c_group_list) {
+ clear_group_down(p);
+ clear_group_suspended(p);
+ dprintk(KERN_ERR "iband resume: gp(%p)\n", p);
+ }
+ clear_group_down(head);
+ clear_group_suspended(head);
+ dprintk(KERN_ERR "iband resume: gp(%p)\n", head);
+ spin_unlock_irqrestore(&dp->g_lock, flags);
+}
+
+/*
+ * Create a new band device:
+ * parameters: <device> <device-group-id> <io_throttle> <io_limit>
+ * <type> <policy> <policy-param...> <group-id:group-param...>
+ */

```

```

+static int ioband_ctr(struct dm_target *ti, unsigned int argc, char **argv)
+{
+ struct ioband_group *gp, *defgrp;
+ struct ioband_device *dp;
+ int io_throttle = DEFAULT_IO_THROTTLE;
+ int io_limit = DEFAULT_IO_LIMIT;
+ int i, r = 0;
+ long val, id;
+ char *param, *endp;
+
+ if (argc < POLICY_PARAM_START) {
+ ti->error = "Requires " __stringify(POLICY_PARAM_START)
+ " or more arguments";
+ return -EINVAL;
+ }
+
+ if (strlen(argv[1]) > IOBAND_NAME_MAX) {
+ ti->error = "loband device name is too long";
+ return -EINVAL;
+ }
+ dprintk(KERN_ERR "ioband_ctr ioband device name:%s\n", argv[1]);
+
+ gp = kzalloc(sizeof(struct ioband_group), GFP_KERNEL);
+ if (!gp) {
+ ti->error = "Cannot allocate memory for ioband group";
+ return -ENOMEM;
+ }
+
+ r = dm_get_device(ti, argv[0], 0, ti->len,
+ dm_table_get_mode(ti->table), &gp->c_dev);
+ if (r) {
+ kfree(gp);
+ ti->error = "Device lookup failed";
+ return r;
+ }
+ ti->private = gp;
+
+ val = simple_strtol(argv[2], NULL, 0);
+ if (val > 0)
+ io_throttle = val;
+
+ val = simple_strtol(argv[3], NULL, 0);
+ if (val > 0)
+ io_limit = val;
+ else {
+ struct request_queue *q;
+
+ q = bdev_get_queue(gp->c_dev->bdev);

```

```

+ if (!q) {
+ dm_put_device(ti, gp->c_dev);
+ kfree(gp);
+ ti->error = "Can't get queue size";
+ return -ENXIO;
+ }
+ dprintk(KERN_ERR "ioband_ctr nr_requests:%lu\n",
+ q->nr_requests);
+ io_limit = q->nr_requests;
+ }
+
+ if (io_limit < io_throttle)
+ io_limit = io_throttle;
+ dprintk(KERN_ERR "ioband_ctr io_throttle:%d io_limit:%d\n",
+ io_throttle, io_limit);
+
+ dp = alloc_ioband_device(argv[1], argv[5], io_throttle, io_limit,
+ argc - POLICY_PARAM_START, &argv[POLICY_PARAM_START]);
+ if (!dp) {
+ dm_put_device(ti, gp->c_dev);
+ kfree(gp);
+ ti->error = "Cannot create ioband device";
+ return -EINVAL;
+ }
+
+ for (i = POLICY_PARAM_START, defgrp = NULL; i < argc; i++) {
+ param = strpbrk(argv[i], POLICY_PARAM_DELIM);
+ if (!param)
+ continue;
+ if (param == argv[i]) { /* default ioband group */
+ if (defgrp) {
+ ti->error =
+ "Default ioband group specified twice";
+ r = -EINVAL;
+ goto error;
+ }
+ param++;
+ r = ioband_group_init(gp, NULL, dp,
+ IOBAND_ID_ANY, param);
+ if (r) {
+ ti->error =
+ "Cannot create default ioband group";
+ goto error;
+ }
+ defgrp = gp;
+ r = ioband_group_type_select(defgrp, argv[4]);
+ if (r) {
+ ti->error = "Cannot set ioband group type";

```

```

+   goto error;
+ }
+ } else { /* sub ioband group */
+ if (!defgrp)
+ break;
+ id = simple_strtol(argv[i], &endp, 0);
+ if (!strchr(POLICY_PARAM_DELIM, *endp)) {
+ ti->error = "Invalid ioband group ID";
+ r = -EINVAL;
+ goto error;
+ }
+ param++;
+ r = ioband_group_attach(defgrp, id, param);
+ if (r) {
+ ti->error = "Cannot create ioband group";
+ goto error;
+ }
+ }
+
+ if (!defgrp) {
+ ti->error = "No default ioband group specified";
+ r = -EINVAL;
+ goto error;
+ }
+ return 0;
+
+error:
+ dm_put_device(ti, gp->c_dev);
+ if (!defgrp)
+ kfree(gp);
+ else
+ ioband_group_destroy_all(gp);
+ release_ioband_device(dp);
+ return r;
+}
+
+static void ioband_dtr(struct dm_target *ti)
+{
+ struct ioband_group *gp = ti->private;
+ struct ioband_device *dp = gp->c_banddev;
+
+ ioband_group_stop_all(gp, 0);
+ dm_put_device(ti, gp->c_dev);
+ ioband_group_destroy_all(gp);
+ release_ioband_device(dp);
+}
+

```

```

+static void ioband_hold_bio(struct ioband_group *gp, struct bio *bio)
+{
+ /* Todo: The list should be split into a read list and a write list */
+ bio_list_add(&gp->c_blocked_bios, bio);
+}
+
+static struct bio *ioband_pop_bio(struct ioband_group *gp)
+{
+ return bio_list_pop(&gp->c_blocked_bios);
+}
+
+static inline void resume_to_accept_bios(struct ioband_group *gp)
+{
+ struct ioband_device *dp = gp->c_banddev;
+
+ if (is_device_blocked(dp) && dp->g_blocked < dp->g_io_limit) {
+ clear_device_blocked(dp);
+ wake_up_all(&dp->g_waitq);
+ }
+ if (is_group_blocked(gp)) {
+ clear_group_blocked(gp);
+ wake_up_all(&gp->c_waitq);
+ }
+}
+
+static inline int device_should_block(struct ioband_group *gp)
+{
+ struct ioband_device *dp = gp->c_banddev;
+
+ if (is_group_down(gp))
+ return 0;
+ if (is_device_blocked(dp))
+ return 1;
+ if (dp->g_blocked >= dp->g_io_limit) {
+ set_device_blocked(dp);
+ return 1;
+ }
+ return 0;
+}
+
+static inline int group_should_block(struct ioband_group *gp)
+{
+ struct ioband_device *dp = gp->c_banddev;
+
+ if (is_group_down(gp))
+ return 0;
+ if (is_group_blocked(gp))
+ return 1;

```

```

+ if (dp->g_should_block(gp)) {
+   set_group_blocked(gp);
+   return 1;
+ }
+ return 0;
+}
+
+static inline void do_nothing(void) {}

+
+static inline void prevent_burst_bios(struct ioband_group *gp)
+{
+ struct ioband_device *dp = gp->c_banddev;
+
+ if (!current->mm) {
+ /*
+ * Kernel threads shouldn't be blocked easily since each of
+ * them may handle BIOS for several groups on several
+ * partitions.
+ */
+ wait_event_lock_irq(dp->g_waitq, !device_should_block(gp),
+ dp->g_lock, do_nothing());
+ } else {
+ wait_event_lock_irq(gp->c_waitq, !group_should_block(gp),
+ dp->g_lock, do_nothing());
+ }
+}
+
+static inline int should_pushback_bio(struct ioband_group *gp)
+{
+ return is_group_suspended(gp) && dm_noflush_suspending(gp->c_target);
+}
+
+static inline void prepare_to_issue(struct ioband_group *gp, struct bio *bio)
+{
+ struct ioband_device *dp = gp->c_banddev;
+
+ dp->g_prepare_bio(gp, bio);
+ dp->g_issued++;
+}
+
+static inline int room_for_bio(struct ioband_group *gp)
+{
+ struct ioband_device *dp = gp->c_banddev;
+
+ return dp->g_issued < dp->g_io_limit || is_group_down(gp);
+}
+
+static inline void hold_bio(struct ioband_group *gp, struct bio *bio)

```

```

+{
+ struct ioband_device *dp = gp->c_banddev;
+
+ dp->g_blocked++;
+ gp->c_blocked++;
+ dp->g_hold_bio(gp, bio);
+}
+
+static inline int release_bios(struct ioband_group *gp,
+ struct bio_list *issue_list, struct bio_list *pushback_list)
+{
+ struct ioband_device *dp = gp->c_banddev;
+ struct bio *bio;
+
+ while (dp->g_can_submit(gp) && gp->c_blocked) {
+ if (!room_for_bio(gp))
+ return 1;
+ bio = dp->g_pop_bio(gp);
+ if (!bio)
+ return 0;
+ dp->g_blocked--;
+ gp->c_blocked--;
+ if (!gp->c_blocked)
+ resume_to_accept_bios(gp);
+ prepare_to_issue(gp, bio);
+ if (is_group_suspended(gp))
+ bio_list_add(pushback_list, bio);
+ else
+ bio_list_add(issue_list, bio);
+ }
+
+ return 0;
+}
+
+static inline struct ioband_group *ioband_group_get(
+ struct ioband_group *head, struct bio *bio)
+{
+ struct ioband_group *gp;
+
+ if (!head->c_type->t_getid)
+ return head;
+
+ gp = ioband_group_find(head, head->c_type->t_getid(bio));
+
+ if (!gp)
+ gp = head;
+ return gp;
+}

```

```

+
+/*
+ * Start to control the bandwidth once the number of uncompleted BIOS
+ * exceeds the value of "io_throttle".
+ */
+static int ioband_map(struct dm_target *ti, struct bio *bio,
+      union map_info *map_context)
+{
+ struct ioband_group *gp = ti->private;
+ struct ioband_group_stat *bws;
+ struct ioband_device *dp = gp->c_banddev;
+ unsigned long flags;
+
+/#if 0 /* not supported yet */
+ if (bio_barrier(bio))
+ return -EOPNOTSUPP;
+/#endif
+
+ spin_lock_irqsave(&dp->g_lock, flags);
+ gp = ioband_group_get(gp, bio);
+ prevent_burst_bios(gp);
+ if (should_pushback_bio(gp)) {
+ spin_unlock_irqrestore(&dp->g_lock, flags);
+ return DM_MAPIO_REQUEUE;
+ }
+
+ bio->bi_bdev = gp->c_dev->bdev;
+ bio->bi_sector -= ti->begin;
+ bws = &gp->c_stat[bio_data_dir(bio)];
+ bws->sectors += bio_sectors(bio);
+
+retry:
+ if (!gp->c_blocked && room_for_bio(gp)) {
+ if (dp->g_can_submit(gp)) {
+ prepare_to_issue(gp, bio);
+ bws->immediate++;
+ spin_unlock_irqrestore(&dp->g_lock, flags);
+ return DM_MAPIO_REMAPPED;
+ } else if (dp->g_issued < dp->g_io_throttle) {
+ dprintk(KERN_ERR "ioband_map: token expired "
+ "gp:%p bio:%p\n", gp, bio);
+ if (dp->g_restart_bios(dp))
+ goto retry;
+ }
+ }
+ hold_bio(gp, bio);
+ bws->deferred++;
+ spin_unlock_irqrestore(&dp->g_lock, flags);
+

```

```

+ return DM_MARIO_SUBMITTED;
+}
+
+/*
+ * Select the best group to resubmit its BIOS.
+ */
+static inline struct ioband_group *choose_best_group(struct ioband_device *dp)
+{
+ struct ioband_group *gp;
+ struct ioband_group *best = NULL;
+ int highest = 0;
+ int pri;
+
+ /* Todo: The algorithm should be optimized.
+ * It would be better to use rbtree.
+ */
+ list_for_each_entry(gp, &dp->g_groups, c_list) {
+ if (!gp->c_blocked || !room_for_bio(gp))
+ continue;
+ pri = dp->g_can_submit(gp);
+ if (pri > highest) {
+ highest = pri;
+ best = gp;
+ }
+ }
+
+ return best;
+}
+
+/*
+ * This function is called right after it becomes able to resubmit BIOS.
+ * It selects the best BIOS and passes them to the underlying layer.
+ */
+if LINUX_VERSION_CODE < KERNEL_VERSION(2,6,20)
+static void ioband_conduct(void *p)
+{
+ struct ioband_device *dp = (struct ioband_device *)p;
+#else
+static void ioband_conduct(struct work_struct *work)
+{
+ struct ioband_device *dp =
+ container_of(work, struct ioband_device, g_conductor);
+#endif
+ struct ioband_group *gp = NULL;
+ struct bio *bio;
+ unsigned long flags;
+ struct bio_list issue_list, pushback_list;
+

```

```

+ bio_list_init(&issue_list);
+ bio_list_init(&pushback_list);
+
+ spin_lock_irqsave(&dp->g_lock, flags);
+retry:
+ while (dp->g_blocked && (gp = choose_best_group(dp)))
+ release_bios(gp, &issue_list, &pushback_list);
+
+ if (dp->g_blocked && dp->gIssued < dp->g_io_throttle) {
+ dprintk(KERN_ERR "iband_conduct: token expired gp:%p\n", gp);
+ if (dp->g_restart_bios(dp))
+ goto retry;
+ }
+
+ spin_unlock_irqrestore(&dp->g_lock, flags);
+
+ while ((bio = bio_list_pop(&issue_list)))
+ generic_make_request(bio);
+ while ((bio = bio_list_pop(&pushback_list)))
+

```

```

+ * not to kick the workqueues so often.
+ */
+ if (dp->g_blocked)
+ queue_work(dp->g_ioband_wq, &dp->g_conductor);
+ spin_unlock_irqrestore(&dp->g_lock, flags);
+ return r;
+}
+
+static void ioband_presuspend(struct dm_target *ti)
+{
+ struct ioband_group *gp = ti->private;
+ ioband_group_stop_all(gp, 1);
+}
+
+static void ioband_resume(struct dm_target *ti)
+{
+ struct ioband_group *gp = ti->private;
+ ioband_group_resume_all(gp);
+}
+
+
+static void ioband_group_status(struct ioband_group *gp, int *szp,
+ char *result, unsigned int maxlen)
+{
+ struct ioband_group_stat *bws;
+ unsigned long reqs;
+ int i, sz = *szp; /* used in DMEMIT() */
+
+ DMEMIT("%d", gp->c_id);
+ for (i = 0; i < 2; i++) {
+ bws = &gp->c_stat[i];
+ reqs = bws->immediate + bws->deferred;
+ DMEMIT("%lu %lu %lu",
+ bws->immediate + bws->deferred, bws->deferred,
+ bws->sectors);
+ }
+ *szp = sz;
+}
+
+static int ioband_status(struct dm_target *ti, status_type_t type,
+ char *result, unsigned int maxlen)
+{
+ struct ioband_group *gp = ti->private, *p;
+ struct ioband_device *dp = gp->c_banddev;
+ int sz = 0; /* used in DMEMIT() */
+ unsigned long flags;
+
+ switch (type) {

```

```

+ case STATUSTYPE_INFO:
+ spin_lock_irqsave(&dp->g_lock, flags);
+ DMEMIT("%s", dp->g_name);
+ ioband_group_status(gp, &sz, result, maxlen);
+ list_for_each_entry(p, &gp->c_group_list, c_group_list)
+ ioband_group_status(p, &sz, result, maxlen);
+ spin_unlock_irqrestore(&dp->g_lock, flags);
+ break;
+
+ case STATUSTYPE_TABLE:
+ spin_lock_irqsave(&dp->g_lock, flags);
+ DMEMIT("%s %s %d %d %s %s",
+ gp->c_dev->name, dp->g_name,
+ dp->g_io_throttle, dp->g_io_limit,
+ gp->c_type->t_name, dp->g_policy->p_name);
+ dp->g_show(gp, &sz, result, maxlen);
+ spin_unlock_irqrestore(&dp->g_lock, flags);
+ break;
+ }
+
+ return 0;
+}
+
+static int ioband_group_type_select(struct ioband_group *gp, char *name)
+{
+ struct ioband_device *dp = gp->c_banddev;
+ struct group_type *t;
+ unsigned long flags;
+
+ for (t = dm_ioband_group_type; (t->t_name); t++) {
+ if (!strcmp(name, t->t_name))
+ break;
+ }
+ if (!t->t_name) {
+ DMWARN("ioband type select: %s isn't supported.", name);
+ return -EINVAL;
+ }
+ spin_lock_irqsave(&dp->g_lock, flags);
+ if (!list_empty(&gp->c_group_list)) {
+ spin_unlock_irqrestore(&dp->g_lock, flags);
+ return -EBUSY;
+ }
+ gp->c_type = t;
+ spin_unlock_irqrestore(&dp->g_lock, flags);
+
+ return 0;
+}
+

```

```

+static inline int split_string(char *s, char **v)
+{
+ long id = IOBAND_ID_ANY;
+ char *p, *q;
+
+ p = strsep(&s, POLICY_PARAM_DELIM);
+ q = strsep(&s, POLICY_PARAM_DELIM);
+ if (!q) {
+   *v = p;
+ } else {
+   id = simple_strtol(p, NULL, 0);
+   *v = q;
+ }
+ return id;
+}

+static int ioband_set_param(struct ioband_group *gp, char *cmd, char *value)
+{
+ struct ioband_device *dp = gp->c_banddev;
+ char *val_str;
+ int id;
+ unsigned long flags;
+ int r;
+
+ id = split_string(value, &val_str);
+
+ spin_lock_irqsave(&dp->g_lock, flags);
+ if (id != IOBAND_ID_ANY) {
+   gp = ioband_group_find(gp, id);
+   if (!gp) {
+     spin_unlock_irqrestore(&dp->g_lock, flags);
+     DMWARN("ioband_set_param: id=%d not found.", id);
+     return -EINVAL;
+   }
+ }
+ r = dp->g_set_param(gp, cmd, val_str);
+ spin_unlock_irqrestore(&dp->g_lock, flags);
+ return r;
+}

+static int ioband_group_attach(struct ioband_group *gp, int id, char *param)
+{
+ struct ioband_device *dp = gp->c_banddev;
+ struct ioband_group *sub_gp;
+ int r;
+
+ if (id < 0) {
+   DMWARN("ioband_group_attach: invalid id:%d", id);

```

```

+ return -EINVAL;
+
+ if (!gp->c_type->t_getid) {
+ DMWARN("iband_group_attach: "
+       "no iband group type is specified");
+ return -EINVAL;
+
+ sub_gp = kzalloc(sizeof(struct iband_group), GFP_KERNEL);
+ if (!sub_gp)
+ return -ENOMEM;
+
+ r = iband_group_init(sub_gp, gp, dp, id, param);
+ if (r < 0) {
+ kfree(sub_gp);
+ return r;
+
+ }
+ return 0;
+}
+
+static int iband_group_detach(struct iband_group *gp, int id)
+{
+ struct iband_device *dp = gp->c_banddev;
+ struct iband_group *sub_gp;
+ unsigned long flags;
+
+ if (id < 0) {
+ DMWARN("iband_group_detach: invalid id:%d", id);
+ return -EINVAL;
+
+ }
+ spin_lock_irqsave(&dp->g_lock, flags);
+ sub_gp = iband_group_find(gp, id);
+ spin_unlock_irqrestore(&dp->g_lock, flags);
+ if (!sub_gp) {
+ DMWARN("iband_group_detach: invalid id:%d", id);
+ return -EINVAL;
+
+ }
+ iband_group_stop(sub_gp);
+ spin_lock_irqsave(&dp->g_lock, flags);
+ iband_group_release(sub_gp);
+ spin_unlock_irqrestore(&dp->g_lock, flags);
+ return 0;
+}
+
+/*
+ * Message parameters:
+ * "policy"    <name>
+ *      ex)

```

```

+ * "policy" "weight"
+ * "type"      "none"|"pid"|"pgrp"|"node"|"cpuset"|"cgroup"|"user"|"gid"
+ * "io_throttle" <value>
+ * "io_limit"   <value>
+ * "attach"     <group id>
+ * "detach"     <group id>
+ * "any-command" <group id>:<value>
+ *     ex)
+ * "weight" 0:<value>
+ * "token" 24:<value>
+ */
+static int ioband_message(struct dm_target *ti, unsigned int argc, char **argv)
+{
+ struct ioband_group *gp = ti->private, *p;
+ struct ioband_device *dp = gp->c_banddev;
+ long val = 0;
+ int r = 0;
+ unsigned long flags;
+
+ if (argc == 1 && !strcmp(argv[0], "reset")) {
+ spin_lock_irqsave(&dp->g_lock, flags);
+ memset(gp->c_stat, 0, sizeof(gp->c_stat));
+ list_for_each_entry(p, &gp->c_group_list, c_group_list)
+ memset(p->c_stat, 0, sizeof(p->c_stat));
+ spin_unlock_irqrestore(&dp->g_lock, flags);
+ return 0;
+ }
+
+ if (argc != 2) {
+ DMWARN("Unrecognised band message received.");
+ return -EINVAL;
+ }
+ if (!strcmp(argv[0], "debug")) {
+ ioband_debug = simple_strtol(argv[1], NULL, 0);
+ if (ioband_debug < 0) ioband_debug = 0;
+ return 0;
+ } else if (!strcmp(argv[0], "io_throttle")) {
+ val = simple_strtol(argv[1], NULL, 0);
+ spin_lock_irqsave(&dp->g_lock, flags);
+ if (val < 0 || val > dp->g_io_limit) {
+ spin_unlock_irqrestore(&dp->g_lock, flags);
+ return -EINVAL;
+ }
+ dp->g_io_throttle = (val == 0) ? DEFAULT_IO_THROTTLE : val;
+ spin_unlock_irqrestore(&dp->g_lock, flags);
+ ioband_set_param(gp, argv[0], argv[1]);
+ return 0;
+ } else if (!strcmp(argv[0], "io_limit")) {

```

```

+ val = simple_strtol(argv[1], NULL, 0);
+ if (val == 0) {
+ struct request_queue *q;
+
+ q = bdev_get_queue(gp->c_dev->bdev);
+ if (!q)
+ return -ENXIO;
+ val = q->nr_requests;
+ }
+ spin_lock_irqsave(&dp->g_lock, flags);
+ if (val < dp->g_io_throttle) {
+ spin_unlock_irqrestore(&dp->g_lock, flags);
+ return -EINVAL;
+ }
+ dp->g_io_limit = val;
+ spin_unlock_irqrestore(&dp->g_lock, flags);
+ ioband_set_param(gp, argv[0], argv[1]);
+ return 0;
+ } else if (!strcmp(argv[0], "type")) {
+ return ioband_group_type_select(gp, argv[1]);
+ } else if (!strcmp(argv[0], "attach")) {
+ long id = simple_strtol(argv[1], NULL, 0);
+ return ioband_group_attach(gp, id, NULL);
+ } else if (!strcmp(argv[0], "detach")) {
+ long id = simple_strtol(argv[1], NULL, 0);
+ return ioband_group_detach(gp, id);
+ } else {
+ /* message anycommand <group-id>:<value> */
+ r = ioband_set_param(gp, argv[0], argv[1]);
+ if (r < 0)
+ DMWARN("Unrecognised band message received.");
+ return r;
+ }
+ return 0;
+}
+
+static struct target_type ioband_target = {
+ .name      = "ioband",
+ .module    = THIS_MODULE,
+ .version   = {0, 0, 4},
+ .ctr       = ioband_ctr,
+ .dtr       = ioband_dtr,
+ .map       = ioband_map,
+ .end_io    = ioband_end_io,
+ .presuspend = ioband_presuspend,
+ .resume    = ioband_resume,
+ .status    = ioband_status,
+ .message   = ioband_message,

```

```

+};

+
+static int __init dm_ioband_init(void)
+{
+ int r;
+
+ r = dm_register_target(&ioband_target);
+ if (r < 0) {
+ DMERR("register failed %d", r);
+ return r;
+ }
+ return r;
+}
+
+static void __exit dm_ioband_exit(void)
+{
+ int r;
+
+ r = dm_unregister_target(&ioband_target);
+ if (r < 0)
+ DMERR("unregister failed %d", r);
+ }
+
+module_init(dm_ioband_init);
+module_exit(dm_ioband_exit);
+
+MODULE_DESCRIPTION(DM_NAME " I/O bandwidth control");
+MODULE_AUTHOR("Hirokazu Takahashi <taka@valinux.co.jp>, "
+ "Ryo Tsuruta <ryov@valinux.co.jp>");
+MODULE_LICENSE("GPL");
diff -uprN linux-2.6.25.orig/drivers/md/dm-ioband.h linux-2.6.25/drivers/md/dm-ioband.h
--- linux-2.6.25.orig/drivers/md/dm-ioband.h 1970-01-01 09:00:00.000000000 +0900
+++ linux-2.6.25/drivers/md/dm-ioband.h 2008-04-24 12:14:51.000000000 +0900
@@ -0,0 +1,127 @@
+/*
+ * Copyright (C) 2008 VA Linux Systems Japan K.K.
+ *
+ * I/O bandwidth control
+ *
+ * This file is released under the GPL.
+ */
+
+#include <linux/version.h>
+#include <linux/wait.h>
+
+#define DEFAULT_IO_THROTTLE 4
+#define DEFAULT_IO_LIMIT 128
#define IOBAND_NAME_MAX 31

```

```

+#define IOBAND_ID_ANY (-1)
+
+struct ioband_group;
+
+struct ioband_device {
+ struct list_head g_groups;
+ struct work_struct g_conductor;
+ struct workqueue_struct *g_ioband_wq;
+ int g_io_throttle;
+ int g_io_limit;
+ int g_issued;
+ int g_blocked;
+ spinlock_t g_lock;
+ wait_queue_head_t g_waitq;
+
+ int g_ref; /* just for debugging */
+ struct list_head g_list;
+ int g_flags;
+ char g_name[IOBAND_NAME_MAX + 1];
+ struct policy_type *g_policy;
+
+ /* policy dependent */
+ int (*g_can_submit)(struct ioband_group *);
+ void (*g_prepare_bio)(struct ioband_group *, struct bio *);
+ int (*g_restart_bios)(struct ioband_device *);
+ void (*g_hold_bio)(struct ioband_group *, struct bio *);
+ struct bio * (*g_pop_bio)(struct ioband_group *);
+ int (*g_group_ctr)(struct ioband_group *, char *);
+ void (*g_group_dtr)(struct ioband_group *);
+ int (*g_set_param)(struct ioband_group *, char *cmd, char *value);
+ int (*g_should_block)(struct ioband_group *);
+ void (*g_show)(struct ioband_group *, int *, char *, unsigned int);
+
+ /* members for weight balancing policy */
+ int g_epoch;
+ int g_weight_total;
+ int g_token_base;
+
+};
+
+struct ioband_group_stat {
+ unsigned long sectors;
+ unsigned long immediate;
+ unsigned long deferred;
+};
+
+struct ioband_group {
+ struct list_head c_list;

```

```

+ struct ioband_device *c_banddev;
+ struct dm_dev *c_dev;
+ struct dm_target *c_target;
+ struct bio_list c_blocked_bios;
+ struct list_head c_group_list;
+ int c_id; /* should be unsigned long or unsigned long long */
+ char c_name[IOBAND_NAME_MAX + 1]; /* rfu */
+ int c_blocked;
+ wait_queue_head_t c_waitq;
+ int c_flags;
+ struct ioband_group_stat c_stat[2]; /* hold rd/wr status */
+ struct group_type *c_type;
+
+ /* members for weight balancing policy */
+ int c_weight;
+ int c_my_epoch;
+ int c_token;
+ int c_token_init_value;
+ int c_limit;
+
+ /* rfu */
+ /* struct bio_list c_ordered_tag_bios; */
+};
+
+#define DEV_BIO_BLOCKED 1
+
+#define set_device_blocked(dp) ((dp)->g_flags |= DEV_BIO_BLOCKED)
+#define clear_device_blocked(dp) ((dp)->g_flags &= ~DEV_BIO_BLOCKED)
+#define is_device_blocked(dp) ((dp)->g_flags & DEV_BIO_BLOCKED)
+
+
+#define IOG_BIO_BLOCKED 1
#define IOG_GOING_DOWN 2
#define IOG_SUSPENDED 4
+
#define set_group_blocked(gp) ((gp)->c_flags |= IOG_BIO_BLOCKED)
#define clear_group_blocked(gp) ((gp)->c_flags &= ~IOG_BIO_BLOCKED)
#define is_group_blocked(gp) ((gp)->c_flags & IOG_BIO_BLOCKED)
+
#define set_group_down(gp) ((gp)->c_flags |= IOG_GOING_DOWN)
#define clear_group_down(gp) ((gp)->c_flags &= ~IOG_GOING_DOWN)
#define is_group_down(gp) ((gp)->c_flags & IOG_GOING_DOWN)
+
#define set_group_suspended(gp) ((gp)->c_flags |= IOG_SUSPENDED)
#define clear_group_suspended(gp) ((gp)->c_flags &= ~IOG_SUSPENDED)
#define is_group_suspended(gp) ((gp)->c_flags & IOG_SUSPENDED)
+
+struct policy_type {

```

```

+ const char *p_name;
+ int (*p_policy_init)(struct ioband_device *, int, char **);
+};
+
+extern struct policy_type dm_ioband_policy_type[];
+
+struct group_type {
+ const char *t_name;
+ int (*t_getid)(struct bio *);
+};
+
+extern struct group_type dm_ioband_group_type[];
+
+/* Just for debugging */
+extern long ioband_debug;
+#define printk(format, a...) \
+ if (ioband_debug > 0) ioband_debug--, printk(format, ##a)
diff -uprN linux-2.6.25.orig/drivers/md/dm-ioband-policy.c
linux-2.6.25/drivers/md/dm-ioband-policy.c
--- linux-2.6.25.orig/drivers/md/dm-ioband-policy.c 1970-01-01 09:00:00.000000000 +0900
+++ linux-2.6.25/drivers/md/dm-ioband-policy.c 2008-04-24 19:49:22.000000000 +0900
@@ -0,0 +1,241 @@
+/*
+ * Copyright (C) 2008 VA Linux Systems Japan K.K.
+ *
+ * I/O bandwidth control
+ *
+ * This file is released under the GPL.
+ */
+#include <linux/bio.h>
+#include <linux/workqueue.h>
+#include "dm.h"
+#include "dm-bio-list.h"
+#include "dm-ioband.h"
+
+/*
+ * The following functions determine when and which BIOs should
+ * be submitted to control the I/O flow.
+ * It is possible to add a new BIO scheduling policy with it.
+ */
+
+/*
+ * Functions for weight balancing policy.
+ */
#define DEFAULT_WEIGHT 100
#define DEFAULT_TOKENBASE 2048
#define IOBAND_IOPRIO_BASE 100

```

```

+
+static int proceed_global_epoch(struct ioband_device *dp)
+{
+    dp->g_epoch++;
+#if 0 /* this will also work correctly */
+    if (dp->g_blocked)
+        queue_work(dp->g_ioband_wq, &dp->g_conductor);
+    return 0;
+#endif
+    dprintk(KERN_ERR "proceed_epoch %d --> %d\n",
+           dp->g_epoch-1, dp->g_epoch);
+    return 1;
+}
+
+static inline int proceed_epoch(struct ioband_group *gp)
+{
+    struct ioband_device *dp = gp->c_banddev;
+
+    if (gp->c_my_epoch != dp->g_epoch) {
+        gp->c_my_epoch = dp->g_epoch;
+        return 1;
+    }
+    return 0;
+}
+
+static inline int iopriority(struct ioband_group *gp)
+{
+    struct ioband_device *dp = gp->c_banddev;
+    int iopri;
+
+    iopri = gp->c_token*IOBAND_IOPRIO_BASE/gp->c_token_init_value + 1;
+    if (gp->c_my_epoch != dp->g_epoch)
+        iopri += IOBAND_IOPRIO_BASE;
+    if (is_group_down(gp))
+        iopri += IOBAND_IOPRIO_BASE*2;
+
+    return iopri;
+}
+
+static int is_token_left(struct ioband_group *gp)
+{
+    if (gp->c_token > 0)
+        return iopriority(gp);
+
+    if (proceed_epoch(gp) || is_group_down(gp)) {
+        gp->c_token = gp->c_token_init_value;
+        dprintk(KERN_ERR "refill token: gp:%p token:%d\n",
+               gp, gp->c_token);
+
+    }
}

```

```

+ return iopriority(gp);
+
+}
+
+return 0;
+
+
+static void prepare_token(struct ioband_group *gp, struct bio *bio)
+{
+ gp->c_token--;
+
+
+static void set_weight(struct ioband_group *gp, int new)
+{
+ struct ioband_device *dp = gp->c_banddev;
+ struct ioband_group *p;
+
+
+ dp->g_weight_total += (new - gp->c_weight);
+ gp->c_weight = new;
+
+
+ list_for_each_entry(p, &dp->g_groups, c_list) {
+ /* Fixme: it might overflow */
+ p->c_token = p->c_token_init_value =
+ dp->g_token_base*p->c_weight/dp->g_weight_total + 1;
+ p->c_limit =
+ dp->g_io_limit*p->c_weight/dp->g_weight_total + 1;
+
+}
+
+
+static int policy_weight_ctr(struct ioband_group *gp, char *arg)
+{
+ struct ioband_device *dp = gp->c_banddev;
+ char *endp;
+ long weight;
+
+
+ if (!arg)
+ weight = DEFAULT_WEIGHT;
+ else {
+ weight = simple_strtol(arg, &endp, 0);
+ if (*endp != '\0' || weight <= 0)
+ return -EINVAL;
+
+
+ gp->c_my_epoch = dp->g_epoch;
+ gp->c_weight = 0;
+ set_weight(gp, weight);
+ return 0;
+
+
+static void policy_weight_dtr(struct ioband_group *gp)

```

```

+{
+ set_weight(gp, 0);
+}
+
+static int policy_weight_param(struct ioband_group *gp, char *cmd, char *value)
+{
+ struct ioband_device *dp = gp->c_banddev;
+ long val = simple_strtol(value, NULL, 0);
+ int r = 0;
+
+ if (!strcmp(cmd, "weight")) {
+ if (val > 0)
+ set_weight(gp, val);
+ else
+ r = -EINVAL;
+ } else if (!strcmp(cmd, "token")) {
+ if (val > 0) {
+ dp->g_token_base = val;
+ set_weight(gp, gp->c_weight);
+ } else
+ r = -EINVAL;
+ } else if (!strcmp(cmd, "io_limit")) {
+ set_weight(gp, gp->c_weight);
+ } else {
+ r = -EINVAL;
+ }
+ return r;
+}
+
+static void policy_weight_show(struct ioband_group *gp, int *szp,
+ char *result, unsigned int maxlen)
+{
+ struct ioband_group *p;
+ struct ioband_device *dp = gp->c_banddev;
+ int sz = *szp; /* used in DMEMIT() */
+
+ DMEMIT(" %d :%d", dp->g_token_base, gp->c_weight);
+ list_for_each_entry(p, &gp->c_group_list, c_group_list)
+ DMEMIT(" %d:%d", p->c_id, p->c_weight);
+ *szp = sz;
+}
+
+static int is_queue_full(struct ioband_group *gp)
+{
+ return gp->c_blocked >= gp->c_limit;
+}
+
+

```

```

+/*
+ * <Method>    <description>
+ * g_can_submit : To determine whether a given group has the right to
+ *                  submit BIOS. The larger the return value the higher the
+ *                  priority to submit. Zero means it has no right.
+ * g_prepare_bio : Called right before submitting each BIO.
+ * g_restart_bios : Called if this ioband device has some BIOS blocked but none
+ *                  of them can be submitted now. This method has to
+ *                  reinitialize the data to restart to submit BIOS and return
+ *                  0 or 1.
+ *                  The return value 0 means that it has become able to submit
+ *                  them now so that this ioband device will continue its work.
+ *                  The return value 1 means that it is still unable to submit
+ *                  them so that this device will stop its work. And this
+ *                  policy module has to reactivate the device when it gets
+ *                  to be able to submit BIOS.
+ * g_hold_bio   : To hold a given BIO until it is submitted.
+ *                  The default function is used when this method is undefined.
+ * g_pop_bio    : To select and get the best BIO to submit.
+ * g_group_ctr  : To initialize the policy own members of struct ioband_group.
+ * g_group_dtr  : Called when struct ioband_group is removed.
+ * g_set_param   : To update the policy own date.
+ *                  The parameters can be passed through "dmsetup message"
+ *                  command.
+ * g_should_block : Called every time this ioband device receive a BIO.
+ *                  Return 1 if a given group can't receive any more BIOS,
+ *                  otherwise return 0.
+ * g_show       : Show the configuration.
+ */
+static int policy_weight_init(struct ioband_device *dp, int argc, char **argv)
+{
+    char *endp;
+    long val;
+
+    if (argc < 1)
+        return -EINVAL;
+
+    val = simple_strtol(argv[0], &endp, 0);
+    if (*endp != '\0' || val < 0)
+        return -EINVAL;
+    if (val == 0)
+        val = DEFAULT_TOKENBASE;
+
+    dp->g_can_submit = is_token_left;
+    dp->g_prepare_bio = prepare_token;
+    dp->g_restart_bios = proceed_global_epoch;
+    dp->g_group_ctr = policy_weight_ctr;
+    dp->g_group_dtr = policy_weight_dtr;

```

```

+ dp->g_set_param = policy_weight_param;
+ dp->g_should_block = is_queue_full;
+ dp->g_show = policy_weight_show;
+
+ dp->g_token_base = val;
+ dp->g_epoch = 0;
+ dp->g_weight_total = 0;
+ return 0;
+}
+/* weight balancing policy. --- End --- */
+
+
+static int policy_default_init(struct ioband_device *dp,
+    int argc, char **argv) /*XXX*/
+{
+    return policy_weight_init(dp, argc, argv); /* temp */
+}
+
+struct policy_type dm_ioband_policy_type[] = {
+ {"default", policy_default_init},
+ {"weight", policy_weight_init},
+ {NULL,    policy_default_init}
+};
diff -uprN linux-2.6.25.orig/drivers/md/dm-ioband-type.c linux-2.6.25/drivers/md/dm-ioband-type.c
--- linux-2.6.25.orig/drivers/md/dm-ioband-type.c 1970-01-01 09:00:00.000000000 +0900
+++ linux-2.6.25/drivers/md/dm-ioband-type.c 2008-04-24 19:40:54.000000000 +0900
@@@ -0,0 +1,87 @@@
+/*
+ * Copyright (C) 2008 VA Linux Systems Japan K.K.
+ *
+ * I/O bandwidth control
+ *
+ * This file is released under the GPL.
+ */
+#include <linux/bio.h>
+#ifdef CONFIG_CGROUP_BIO
+#include <linux/biocontrol.h>
#endif
#ifndef dm_h
#include "dm.h"
#include "dm-bio-list.h"
#include "dm-ioband.h"
+
+/*
+ * Any I/O bandwidth can be divided into several bandwidth groups, each of which
+ * has its own unique ID. The following functions are called to determine
+ * which group a given BIO belongs to and return the ID of the group.
+ */
+

```

```

+/* ToDo: unsigned long value would be better for group ID */
+
+static int ioband_process_id(struct bio *bio)
+{
+ /*
+  * This function will work for KVM and Xen.
+  */
+ return (int)current->tgid;
+}
+
+static int ioband_process_group(struct bio *bio)
+{
+#if LINUX_VERSION_CODE < KERNEL_VERSION(2,6,24)
+ return (int)process_group(current);
+#else
+ return (int)task_pgrp_nr(current);
+#endif
+}
+
+static int ioband_uid(struct bio *bio)
+{
+ return (int)current->uid;
+}
+
+static int ioband_gid(struct bio *bio)
+{
+ return (int)current->gid;
+}
+
+static int ioband_cpuset(struct bio *bio)
+{
+ return 0; /* not implemented yet */
+}
+
+static int ioband_node(struct bio *bio)
+{
+ return 0; /* not implemented yet */
+}
+
+static int ioband_cgroup(struct bio *bio)
+{
+#ifdef CONFIG_CGROUP_BIO
+ return get_bio_cgroup_id(bio->bi_io_vec[0].bv_page);
+#else
+ /*
+  * This function should return the ID of the cgroup which issued "bio".
+  * The ID of the cgroup which the current process belongs to won't be
+  * suitable ID for this purpose, since some BIOS will be handled by kernel

```

```

+ * threads like aio or pdflush on behalf of the process requesting the BIOs.
+ */
+ return 0; /* not implemented yet */
#endif
+}
+
+struct group_type dm_ioband_group_type[] = {
+ {"none", NULL},
+ {"pgrp", ioband_process_group},
+ {"pid", ioband_process_id},
+ {"node", ioband_node},
+ {"cpuset", ioband_cpuset},
+ {"cgroup", ioband_cgroup},
+ {"user", ioband_uid},
+ {"uid", ioband_uid},
+ {"gid", ioband_gid},
+ {NULL, NULL}
+};
diff -uprN linux-2.6.25.orig/drivers/md/Kconfig linux-2.6.25/drivers/md/Kconfig
--- linux-2.6.25.orig/drivers/md/Kconfig 2008-04-17 11:49:44.000000000 +0900
+++ linux-2.6.25/drivers/md/Kconfig 2008-04-24 17:40:43.000000000 +0900
@@ -288,4 +288,17 @@ config DM_UEVENT
---help---
Generate udev events for DM events.
```

```

+config DM_IOBAND
+ tristate "I/O bandwidth control (EXPERIMENTAL)"
+ depends on BLK_DEV_DM && EXPERIMENTAL
+ ---help---
+ This device-mapper target allows to define how the
+ available bandwidth of a storage device should be
+ shared between processes, cgroups, the partitions or the LUNs.
+
+ Information on how to use dm-ioband is available in:
+ <file:Documentation/device-mapper/ioband.txt>.
+
+ If unsure, say N.
+
+endif # MD
diff -uprN linux-2.6.25.orig/drivers/md/Makefile linux-2.6.25/drivers/md/Makefile
--- linux-2.6.25.orig/drivers/md/Makefile 2008-04-17 11:49:44.000000000 +0900
+++ linux-2.6.25/drivers/md/Makefile 2008-04-24 17:40:18.000000000 +0900
@@ -3,12 +3,13 @@ 
#

```

```

dm-mod-objs := dm.o dm-table.o dm-target.o dm-linear.o dm-stripe.o \
- dm-ioctl.o dm-io.o kcopyd.o
+ dm-ioctl.o dm-io.o dm-kcopyd.o
```

```

dm-multipath-objs := dm-hw-handler.o dm-path-selector.o dm-mpath.o
dm-snapshot-objs := dm-snap.o dm-exception-store.o
-dm-mirror-objs := dm-log.o dm-raid1.o
+dm-mirror-objs := dm-raid1.o
dm-rdac-objs := dm-mpath-rdac.o
dm-hp-sw-objs := dm-mpath-hp-sw.o
+dm-ioband-objs := dm-ioband-ctl.o dm-ioband-policy.o dm-ioband-type.o
md-mod-objs    := md.o bitmap.o
raid456-objs := raid5.o raid6algos.o raid6recov.o raid6tables.o \
    raid6int1.o raid6int2.o raid6int4.o \
@@ -39,8 +40,9 @@ obj-$(CONFIG_DM_MULTIPATH_EMCA) += dm-emc
obj-$(CONFIG_DM_MULTIPATH_HP) += dm-hp-sw.o
obj-$(CONFIG_DM_MULTIPATH_RDAC) += dm-rdac.o
obj-$(CONFIG_DM_SNAPSHOT) += dm-snapshot.o
-obj-$(CONFIG_DM_MIRROR) += dm-mirror.o
+obj-$(CONFIG_DM_MIRROR) += dm-mirror.o dm-log.o
obj-$(CONFIG_DM_ZERO) += dm-zero.o
+obj-$(CONFIG_DM_IOBAND) += dm-ioband.o

quiet_cmd_unroll = UNROLL $@
cmd_unroll = $(PERL) $(srctree)/$(src)/unroll.pl $(UNROLL) \

```

Containers mailing list  
 Containers@lists.linux-foundation.org  
<https://lists.linux-foundation.org/mailman/listinfo/containers>

Subject: [PATCH 2/2] dm-ioband: I/O bandwidth controller v0.0.4: Document  
 Posted by [Ryo Tsuruta](#) on Thu, 24 Apr 2008 11:22:19 GMT  
[View Forum Message](#) <> [Reply to Message](#)

Here is the document of dm-ioband.

Based on 2.6.25

Signed-off-by: Ryo Tsuruta <[ryov@valinux.co.jp](mailto:ryov@valinux.co.jp)>

Signed-off-by: Hirokazu Takahashi <[taka@valinux.co.jp](mailto:taka@valinux.co.jp)>

```

diff -uprN linux-2.6.25.orig/Documentation/device-mapper/ioband.txt
linux-2.6.25/Documentation/device-mapper/ioband.txt
--- linux-2.6.25.orig/Documentation/device-mapper/ioband.txt 1970-01-01 09:00:00.000000000
+0900
+++ linux-2.6.25/Documentation/device-mapper/ioband.txt 2008-04-24 16:51:58.000000000
+0900
@@ -0,0 +1,883 @@
+      Block I/O bandwidth control: dm-ioband
+
+      -----
+
```

- + Table of Contents
- +
- + [1]What's dm-ioband all about?
- +
- + [2]Differences from the CFQ I/O scheduler
- +
- + [3]How dm-ioband works.
- +
- + [4]Setup and Installation
- +
- + [5]Getting started
- +
- + [6]Command Reference
- +
- + [7]Examples
- +
- + What's dm-ioband all about?
- +
- + dm-ioband is an I/O bandwidth controller implemented as a device-mapper driver. Several jobs using the same physical device have to share the bandwidth of the device. dm-ioband gives bandwidth to each job according to its weight, which each job can set its own value to.
- +
- + At this time, a job is a group of processes with the same pid or pgrp or uid. There is also a plan to make it support cgroup. A job can also be a virtual machine such as KVM or Xen.
- +
- + +-----+ +-----+ +-----+ +-----+ +-----+ +-----+
  - + |cgroup| |cgroup| | the | | pid || pid || the | jobs
  - + | A || B | |others| | X || Y | |others|
  - + +---+---+---+---+---+ +---+---+---+---+---+
  - + +--V---+--V---+--V---+ +--V---+--V---+--V---+--V---+
  - + | group | group | default| | group | group | default| ioband groups
  - + | | | group | | | | group |
  - + +-----+ +-----+ +-----+ +-----+
  - + | ioband1 | | ioband2 | ioband devices
  - + +-----+-----+ +-----+-----+
  - + +-----V-----+-----V-----+
  - + | | |
  - + | sdb1 | sdb2 | physical devices
  - + +-----+-----+
- +
- +
- +
- + -----
- +
- + Differences from the CFQ I/O scheduler
- +
- + Dm-ioband is flexible to configure the bandwidth settings.

- +
  - + Dm-iband can work with any type of I/O scheduler such as the NOOP scheduler, which is often chosen for high-end storages, since it is implemented outside the I/O scheduling layer. It allows both of partition based bandwidth control and job --- a group of processes --- based control. In addition, it can set different configuration on each physical device to control its bandwidth.
  - + Meanwhile the current implementation of the CFQ scheduler has 8 IO priority levels and all jobs whose processes have the same IO priority share the bandwidth assigned to this level between them. And IO priority is an attribute of a process so that it equally effects to all block devices.
  - +-----
- +How dm-iband works.
  - + Every iband device has one iband group, which by default is called the default group.
  - + Iband devices can also have extra iband groups in them. Each iband group has a job to support and a weight. Proportional to the weight, dm-iband gives tokens to the group.
  - + A group passes on I/O requests that its job issues to the underlying layer so long as it has tokens left, while requests are blocked if there aren't any tokens left in the group. One token is consumed each time the group passes on a request. dm-iband will refill groups with tokens once all of groups that have requests on a given physical device use up their tokens.
  - + With this approach, a job running on an iband group with large weight is guaranteed to be able to issue a large number of I/O requests.
  - +-----
- +Setup and Installation
  - + Build a kernel with these options enabled:
    - + CONFIG\_MD
    - + CONFIG\_BLK\_DEV\_DM
    - + CONFIG\_DM\_IOBAND
  - + If compiled as module, use modprobe to load dm-iband.

```

+ # make modules
+ # make modules_install
+ # depmod -a
+ # modprobe dm-ioband
+
+
+ "dmsetup targets" command shows all available device-mapper targets.
+ "ioband" is displayed if dm-ioband has been loaded.
+
+ # dmsetup targets
+ ioband      v0.0.4
+
+
+ -----
+
+ Getting started
+
+ The following is a brief description how to control the I/O bandwidth of
+ disks. In this description, we'll take one disk with two partitions as an
+ example target.
+
+ -----
+
+ Create and map ioband devices
+
+ Create two ioband devices "ioband1" and "ioband2". "ioband1" is mapped
+ to "/dev/sda1" and has a weight of 40. "ioband2" is mapped to "/dev/sda2"
+ and has a weight of 10. "ioband1" can use 80% --- 40/(40+10)*100 --- of
+ the bandwidth of the physical disk "/dev/sda" while "ioband2" can use 20%.
+
+ # echo "0 $(blockdev --getsize /dev/sda1) ioband /dev/sda1 1 0 0 none" \
+     "weight 0 :40" | dmsetup create ioband1
+ # echo "0 $(blockdev --getsize /dev/sda2) ioband /dev/sda2 1 0 0 none" \
+     "weight 0 :10" | dmsetup create ioband2
+
+
+ If the commands are successful then the device files
+ "/dev/mapper/ioband1" and "/dev/mapper/ioband2" will have been created.
+
+ -----
+
+ Additional bandwidth control
+
+ In this example two extra ioband groups are created on "ioband1". The
+ first group consists of all the processes with user-id 1000 and the second
+ group consists of all the processes with user-id 2000. Their weights are
+ 30 and 20 respectively.
+

```

```
+ # dmsetup message ioband1 0 type user
+ # dmsetup message ioband1 0 attach 1000
+ # dmsetup message ioband1 0 attach 2000
+ # dmsetup message ioband1 0 weight 1000:30
+ # dmsetup message ioband1 0 weight 2000:20
+
+
+ Now the processes in the user-id 1000 group can use 30% ---
+ 30/(30+20+40+10)*100 --- of the bandwidth of the physical disk.
```

#### + Table 1. Weight assignments

ioband device	ioband group	ioband weight
ioband1	user id 1000	30
ioband1	user id 2000	20
ioband1	default group(the other users)	40
ioband2	default group	10

#### + Remove the ioband devices

```
+ Remove the ioband devices when no longer used.
+
+ # dmsetup remove ioband1
+ # dmsetup remove ioband2
```

#### +Command Reference

##### + Create an ioband device

```
+ SYNOPSIS
+
+ dmsetup create IOBAND_DEVICE
```

##### + DESCRIPTION

```
+ Create an ioband device with the given name IOBAND_DEVICE.
+ Generally, dmsetup reads a table from standard input. Each line of
```

+ the table specifies a single target and is of the form:

+  
+ start\_sector num\_sectors "ioband" device\_file ioband\_device\_id \  
+ io\_throttle io\_limit ioband\_group\_type policy token\_base \  
+ :weight [ioband\_group\_id:weight...]

+  
+ start\_sector, num\_sectors

+  
+ The sector range of the underlying device where  
dm-ioband maps.

+  
+ ioband

+  
+ Specify the string "ioband" as a target type.

+  
+ device\_file

+  
+ Underlying device name.

+  
+ ioband\_device\_id

+  
+ The ID number for an ioband device. The same ID  
must be set among the ioband devices that share the  
same bandwidth, which means they work on the same  
physical disk.

+  
+ io\_throttle

+  
+ Dm-ioband starts to control the bandwidth when the  
number of BIOs in progress exceeds this value. If 0  
is specified, dm-ioband uses the default value.

+  
+ io\_limit

+  
+ Dm-ioband blocks all I/O requests for the  
IOBAND\_DEVICE when the number of BIOs in progress  
exceeds this value. If 0 is specified, dm-ioband uses  
the default value.

+  
+ ioband\_group\_type

+  
+ Specify how to evaluate the ioband group ID. The  
type must be one of "none", "user", "gid", "pid" or  
"pgrp." Specify "none" if you don't need any ioband  
groups other than the default ioband group.

+  
+ policy

```
+          Bandwidth control policy. Currently support only  
+          "weight", which controls issuing I/O requests to the  
+          underlying device according to the proportional to  
+          the weight of each ioband group.  
+  
+          token_base  
+  
+              The number of tokens which specified by token_base  
+              will be distributed to all ioband groups according to  
+              the proportional to the weight of each ioband group.  
+              If 0 is specified, dm-ioband uses the default value.  
+  
+          ioband_group_id:weight  
+  
+              Set the weight of the ioband group specified by  
+              ioband_group_id. If ioband_group_id is omitted, the  
+              weight is assigned to the default ioband group.  
+  
+ EXAMPLE  
+  
+     Create an ioband device with the following parameters:  
+  
+         * Starting sector = "0"  
+  
+         * The number of sectors = "$(blockdev --getsize /dev/sda1)"  
+  
+         * Target type = "ioband"  
+  
+         * Underlying device name = "/dev/sda1"  
+  
+         * Ioband device ID = "128"  
+  
+         * I/O throttle = "10"  
+  
+         * I/O limit = "400"  
+  
+         * Ioband group type = "user"  
+  
+         * Bandwidth control policy = "weight"  
+  
+         * Token base = "2048"  
+  
+         * Weight for the default ioband group = "100"  
+  
+         * Weight for the ioband group 1000 = "80"  
+  
+         * Weight for the ioband group 2000 = "20"
```

```

+
+      * loband device name = "ioband1"
+
+      # echo "0 $(blockdev --getsize /dev/sda1) ioband" \
+          "/dev/sda1 128 10 400 user weight 2048 :100 1000:80 2000:20" \
+          | dmsetup create ioband1
+
+
+      Create two device groups (ID=1,2). The bandwidths of these
+      device groups will be individually controlled.
+
+      # echo "0 $(blockdev --getsize /dev/sda1) ioband /dev/sda1 1" \
+          "0 0 none weight 0 :80" | dmsetup create ioband1
+      # echo "0 $(blockdev --getsize /dev/sda2) ioband /dev/sda2 1" \
+          "0 0 none weight 0 :20" | dmsetup create ioband2
+      # echo "0 $(blockdev --getsize /dev/sdb3) ioband /dev/sdb3 2" \
+          "0 0 none weight 0 :60" | dmsetup create ioband3
+      # echo "0 $(blockdev --getsize /dev/sdb4) ioband /dev/sdb4 2" \
+          "0 0 none weight 0 :40" | dmsetup create ioband4
+
+
+ -----
+
+ Remove the ioband device
+
+ SYNOPSIS
+
+     dmsetup remove IOBAND_DEVICE
+
+ DESCRIPTION
+
+     Remove the specified ioband device IOBAND_DEVICE. All the band
+     groups attached to the ioband device are also removed
+     automatically.
+
+ EXAMPLE
+
+     Remove ioband device "ioband1."
+
+     # dmsetup remove ioband1
+
+
+ -----
+
+ Set an ioband group type
+
+ SYNOPSIS
+

```

```
+ dmsetup message IOBAND_DEVICE 0 type TYPE
+
+ DESCRIPTION
+
+ Set the ioband group type of the specified ioband device
+ IOBAND_DEVICE. TYPE must be one of "none", "user", "gid", "pid" or
+ "pgrp." Once the type is set, new ioband groups can be created on
+ IOBAND_DEVICE.
+
+ EXAMPLE
+
+ Set the ioband group type of ioband device "iband1" to "user."
+
+ # dmsetup message ioband1 0 type user
+
+
+ -----
+
+ Create an ioband group
+
+ SYNOPSIS
+
+ dmsetup message IOBAND_DEVICE 0 attach ID
+
+ DESCRIPTION
+
+ Create an ioband group and attach it to IOBAND_DEVICE. ID
+ specifies user-id, group-id, process-id or process-group-id
+ depending the ioband group type of IOBAND_DEVICE.
+
+ EXAMPLE
+
+ Create an ioband group which consists of all processes with
+ user-id 1000 and attach it to ioband device "iband1."
+
+ # dmsetup message ioband1 0 type user
+ # dmsetup message ioband1 0 attach 1000
+
+
+ -----
+
+ Detach the ioband group
+
+ SYNOPSIS
+
+ dmsetup message IOBAND_DEVICE 0 detach ID
+
+ DESCRIPTION
```

```
+      Detach the ioband group specified by ID from ioband device
+      IOBAND_DEVICE.
+
+ EXAMPLE
+
+      Detach the ioband group with ID "2000" from ioband device
+      "ioband2."
+
+      # dmsetup message ioband2 0 detach 1000
+
+
+ -----
+
+ Set the weight of an ioband group
+
+ SYNOPSIS
+
+      dmsetup message IOBAND_DEVICE 0 weight VAL
+
+      dmsetup message IOBAND_DEVICE 0 weight ID:VAL
+
+ DESCRIPTION
+
+      Set the weight of the ioband group specified by ID. Set the
+      weight of the default ioband group of IOBAND_DEVICE if ID isn't
+      specified.
+
+      The following example means that "ioband1" can use 80% ---  

+      40/(40+10)*100 --- of the bandwidth of the physical disk while
+      "ioband2" can use 20%.
+
+      # dmsetup message ioband1 0 weight 40
+      # dmsetup message ioband2 0 weight 10
+
+
+ The following lines have the same effect as the above:
+
+      # dmsetup message ioband1 0 weight 4
+      # dmsetup message ioband2 0 weight 1
+
+
+      VAL must be an integer larger than 0. The default value, which
+      is assigned to newly created ioband groups, is 100.
+
+ EXAMPLE
+
+      Set the weight of the default ioband group of "ioband1" to 40.
```

```
+      # dmsetup message ioband1 0 weight 40
+
+
+      Set the weight of the ioband group of "ioband1" with ID "1000"
+      to 10.
+
+      # dmsetup message ioband1 0 weight 1000:10
+
+
+ -----
+
+ Set the number of tokens
+
+ SYNOPSIS
+
+      dmsetup message IOBAND_DEVICE 0 token VAL
+
+ DESCRIPTION
+
+      Set the number of tokens to VAL. According to their weight, this
+      number of tokens will be distributed to all the ioband groups on
+      the physical device to which ioband device IOBAND_DEVICE belongs
+      when they use up their tokens.
+
+      VAL must be an integer greater than 0. The default is 2048.
+
+ EXAMPLE
+
+      Set the number of tokens of the physical device to which
+      "ioband1" belongs to 256.
+
+      # dmsetup message ioband1 0 token 256
+
+
+ -----
+
+ Set I/O throttling
+
+ SYNOPSIS
+
+      dmsetup message IOBAND_DEVICE 0 io_throttle VAL
+
+ DESCRIPTION
+
+      Set the I/O throttling value of the physical disk to which
+      ioband device IOBAND_DEVICE belongs to VAL. Dm-ioband start to
+      control the bandwidth when the number of BIOS in progress on the
```


```
+ physical disk exceeds this value.  
+  
+ EXAMPLE  
+  
+ Set the I/O throttling value of "ioband1" to 16.  
+  
+ # dmsetup message ioband1 0 io_throttle 16  
+  
+  
+ -----  
+  
+ Set I/O limiting  
+  
+ SYNOPSIS  
+  
+ dmsetup message IOBAND_DEVICE 0 io_limit VAL  
+  
+ DESCRIPTION  
+  
+ Set the I/O limiting value of the physical disk to which ioband  
+ device IOBAND_DEVICE belongs to VAL. Dm-ioband will block all I/O  
+ requests for the physical device if the number of BIOS in progress  
+ on the physical disk exceeds this value.  
+  
+ EXAMPLE  
+  
+ Set the I/O limiting value of "ioband1" to 128.  
+  
+ # dmsetup message ioband1 0 io_limit 128  
+  
+  
+ -----  
+  
+ Display settings  
+  
+ SYNOPSIS  
+  
+ dmsetup table --target ioband  
+  
+ DESCRIPTION  
+  
+ Display the current table for the ioband device in a format. See  
+ "dmsetup create" command for information on the table format.  
+  
+ EXAMPLE  
+  
+ The following output shows the current table of "ioband1."  
+
```

```
+ # dmsetup table --target ioband
+ ioband: 0 32129937 ioband1 8:29 128 10 400 user weight \
+     2048 :100 1000:80 2000:20
+
+
+ -----
+
+ Display Statistics
+
+ SYNOPSIS
+
+     dmsetup status --target ioband
+
+ DESCRIPTION
+
+     Display the statistics of all the ioband devices whose target
+     type is "ioband."
+
+     The output format is as below. the first five columns shows:
+
+         * ioband device name
+
+         * logical start sector of the device (must be 0)
+
+         * device size in sectors
+
+         * target type (must be "ioband")
+
+         * device group ID
+
+     The remaining columns show the statistics of each ioband group
+     on the band device. Each group uses seven columns for its
+     statistics.
+
+         * ioband group ID (-1 means default)
+
+         * total read requests
+
+         * delayed read requests
+
+         * total read sectors
+
+         * total write requests
+
+         * delayed write requests
+
+         * total write sectors
```

```

+ EXAMPLE
+
+      The following output shows the statistics of two ioband devices.
+      ioband2 only has the default ioband group and ioband1 has three
+      (default, 1001, 1002) ioband groups.
+
+      # dmsetup status
+      ioband2: 0 44371467 ioband 128 -1 143 90 424 122 78 352
+      ioband1: 0 44371467 ioband 128 -1 223 172 408 211 136 600 1001 \
+              166 107 472 139 95 352 1002 211 146 520 210 147 504
+
+
+ -----
+
+ Reset status counter
+
+ SYNOPSIS
+
+      dmsetup message IOBAND_DEVICE 0 reset
+
+ DESCRIPTION
+
+      Reset the statistics of ioband device IOBAND_DEVICE.
+
+ EXAMPLE
+
+      Reset the statistics of "iband1."
+
+      # dmsetup message ioband1 0 reset
+
+
+ -----
+
+ Examples
+
+ Example #1: Bandwidth control on Partitions
+
+      This example describes how to control the bandwidth with disk
+      partitions. The following diagram illustrates the configuration of this
+      example. You may want to run a database on /dev/mapper/ioband1 and web
+      applications on /dev/mapper/ioband2.
+
+      /mnt1           /mnt2           mount points
+      |               |
+      +-----V-----+ +-----V-----+
+      | /dev/mapper/ioband1 || /dev/mapper/ioband2 | ioband devices
+      +-----+ +-----+
+      |     default group    ||     default group    | ioband groups

```

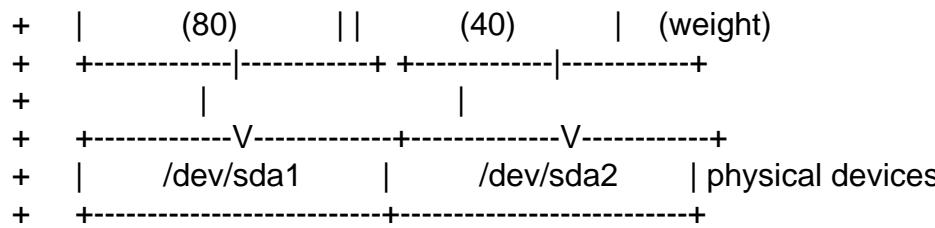

+ To setup the above configuration, follow these steps:

- + 1. Create ioband devices with the same device group ID and assign weights of 80 and 40 to the default ioband groups respectively.
- +  

```
# echo "0 $(blockdev --getsize /dev/sda1) ioband /dev/sda1 1 0 0" \
    "none weight 0 :80" | dmsetup create ioband1
# echo "0 $(blockdev --getsize /dev/sda2) ioband /dev/sda2 1 0 0" \
    "none weight 0 :40" | dmsetup create ioband2
```


- + 2. Create filesystems on the ioband devices and mount them.

```
# mkfs.ext3 /dev/mapper/ioband1
# mount /dev/mapper/ioband1 /mnt1

# mkfs.ext3 /dev/mapper/ioband2
# mount /dev/mapper/ioband2 /mnt2
```

#### + Example #2: Bandwidth control on Logical Volumes

+ This example is similar to the example #1 but it uses LVM logical volumes instead of disk partitions. This example shows how to configure ioband devices on two striped logical volumes.

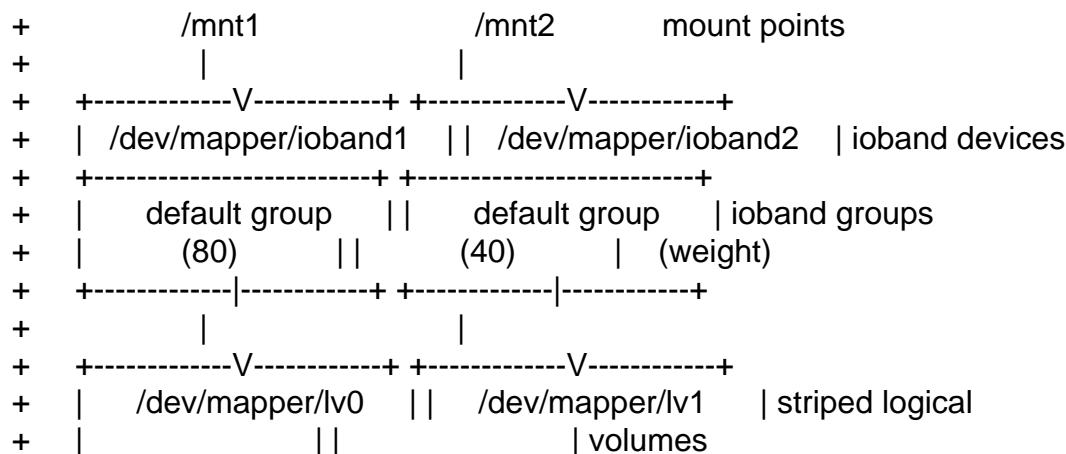

```

+ +-----+
+ |           vg0           | volume group
+ +-----+-----+
+ |           |           |
+ +-----V-----+ +-----V-----+
+ |   /dev/sdb   ||   /dev/sdc   | physical devices
+ +-----+ +-----+
+
+
+ To setup the above configuration, follow these steps:
+
+ 1. Initialize the partitions for use by LVM.
+
+ # pvcreate /dev/sdb
+ # pvcreate /dev/sdc
+
+
+ 2. Create a new volume group named "vg0" with /dev/sdb and /dev/sdc.
+
+ # vgcreate vg0 /dev/sdb /dev/sdc
+
+
+ 3. Create two logical volumes in "vg0." The volumes have to be striped.
+
+ # lvcreate -n lv0 -i 2 -l 64 vg0 -L 1024M
+ # lvcreate -n lv1 -i 2 -l 64 vg0 -L 1024M
+
+
+ The rest is the same as the example #1.
+
+ 4. Create ioband devices corresponding to each logical volume and
+ assign weights of 80 and 40 to the default ioband groups respectively.
+
+ # echo "0 $(blockdev --getsize /dev/mapper/vg0-lv0)" \
+       "ioband /dev/mapper/vg0-lv0 1 0 0 none weight 0 :80" | \
+       dmsetup create ioband1
+ # echo "0 $(blockdev --getsize /dev/mapper/vg0-lv1)" \
+       "ioband /dev/mapper/vg0-lv1 1 0 0 none weight 0 :40" | \
+       dmsetup create ioband2
+
+
+ 5. Create filesystems on the ioband devices and mount them.
+
+ # mkfs.ext3 /dev/mapper/ioband1
+ # mount /dev/mapper/ioband1 /mnt1
+
+ # mkfs.ext3 /dev/mapper/ioband2
+ # mount /dev/mapper/ioband2 /mnt2


```

```

+
+
+
+ -----
+
+ Example #3: Bandwidth control on processes
+
+ This example describes how to control the bandwidth with groups of
+ processes. You may also want to run an additional application on the same
+ machine described in the example #1. This example shows how to add a new
+ ioband group for this application.
+
+      /mnt1          /mnt2      mount points
+      |           |
+ +-----V-----+ +-----V-----+
+ | /dev/mapper/ioband1 || /dev/mapper/ioband2 | ioband devices
+ +-----+ +-----+ +-----+
+ | default    || user=1000 | default | ioband groups
+ | (80)       || (20)   | (40)   | (weight)
+ +-----+ +-----+ +-----+
+      |           |
+ +-----V-----+-----V-----+
+ | /dev/sda1     | /dev/sda2     | physical device
+ +-----+ +-----+
+
+
+ The following shows to set up a new ioband group on the machine that is
+ already configured as the example #1. The application will have a weight
+ of 20 and run with user-id 1000 on /dev/mapper/ioband2.
+
+ 1. Set the type of ioband2 to "user."
+
+ # dmsetup message ioband2 0 type user.
+
+
+ 2. Create a new ioband group on ioband2.
+
+ # dmsetup message ioband2 0 attach 1000
+
+
+ 3. Assign weight of 10 to this newly created ioband group.
+
+ # dmsetup message ioband2 0 weight 1000:20
+
+
+ -----
+
+ Example #4: Bandwidth control for Xen virtual block devices
+

```

- + This example describes how to control the bandwidth for Xen virtual block devices. The following diagram illustrates the configuration of this example.

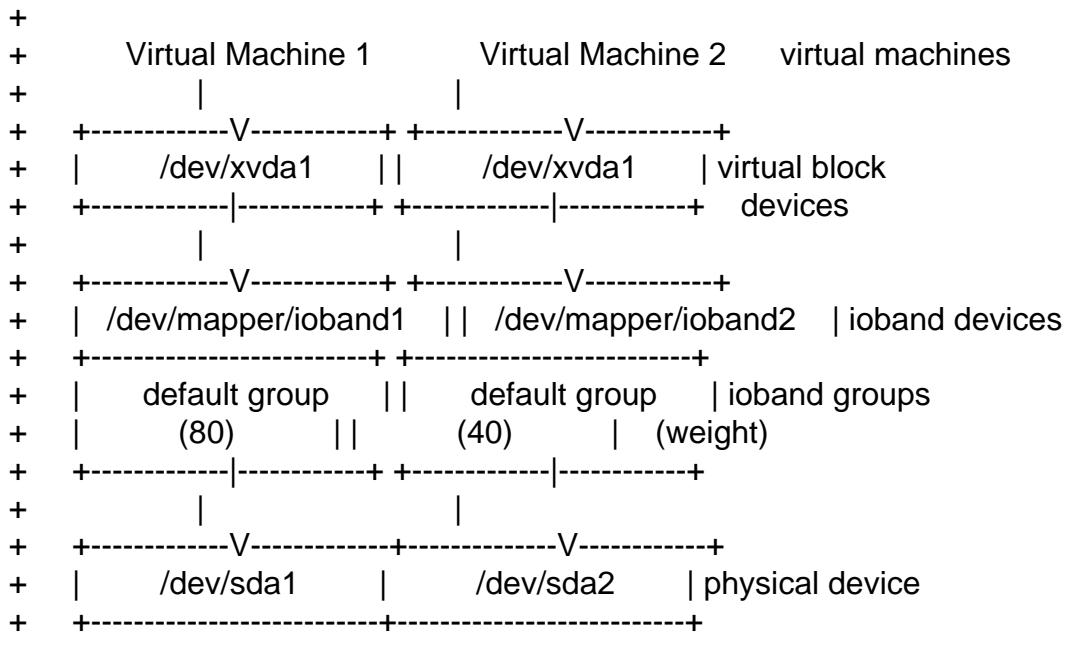

- + The followings shows how to map ioband device "ioband1" and "ioband2" to virtual block device "/dev/xvda1 on Virtual Machine 1" and "/dev/xvda1 on Virtual Machine 2" respectively on the machine configured as the example
- + #1. Add the following lines to the configuration files that are referenced when creating "Virtual Machine 1" and "Virtual Machine 2."


```


+      For "Virtual Machine 1"
+      disk = [ 'phy:/dev/mapper/ioband1,xvda,w' ]
+
+      For "Virtual Machine 2"
+      disk = [ 'phy:/dev/mapper/ioband2,xvda,w' ]
+
```

---

#### + Example #5: Bandwidth control for Xen blktap devices

- + This example describes how to control the bandwidth for Xen virtual block devices when Xen blktap devices are used. The following diagram illustrates the configuration of this example.

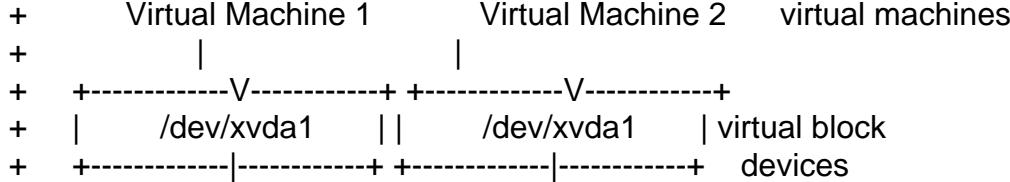

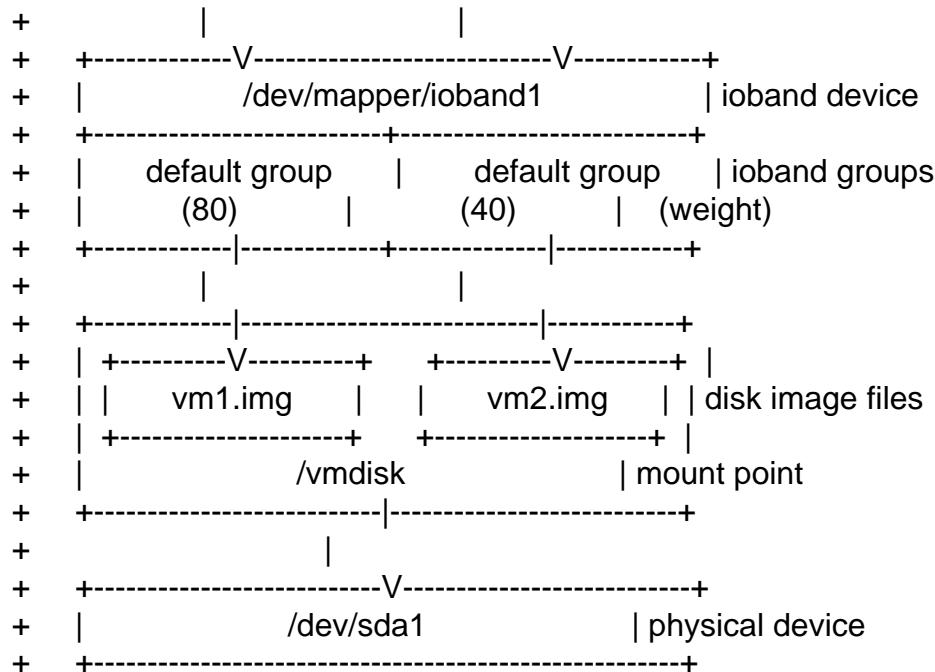

+ To setup the above configuration, follow these steps:

- + 1. Create an ioband device.

```
+ # echo "0 $(blockdev --getsize /dev/sda1) ioband /dev/sda1" \
+     "1 0 0 none weight 0 :100" | dmsetup create ioband1
```

- + 2. Add the following lines to the configuration files that are  
referenced when creating "Virtual Machine 1" and "Virtual Machine 2."  
Disk image files "/vmdisk/vm1.img" and "/vmdisk/vm2.img" will be used.

+ For "Virtual Machine 1"

```
+ disk = [ 'tap:aio:/vmdisk/vm1.img,xvda,w', ]
```

+ For "Virtual Machine 1"

```
+ disk = [ 'tap:aio:/vmdisk/vm2.img,xvda,w', ]
```

- + 3. Run the virtual machines.

```
+ # xm create vm1
+ # xm create vm2
```

- + 4. Find out the process IDs of the daemons which control the blktap  
devices.

```

+ # lsblk /vmdisk/disk[12].img
+ COMMAND PID USER FD TYPE DEVICE SIZE NODE NAME
+ tapdisk 15011 root 11u REG 253,0 2147483648 48961 /vmdisk/vm1.img
+ tapdisk 15276 root 13u REG 253,0 2147483648 48962 /vmdisk/vm2.img
+
+
+ 5. Create new ioband groups of pid 15011 and pid 15276, which are
+ process IDs of the tapdisks, and assign weight of 80 and 40 to the
+ groups respectively.
+
+ # dmsetup message ioband1 0 type pid
+ # dmsetup message ioband1 0 attach 15011
+ # dmsetup message ioband1 0 weight 15011:80
+ # dmsetup message ioband1 0 attach 15276
+ # dmsetup message ioband1 0 weight 15276:40

```

---

Containers mailing list

Containers@lists.linux-foundation.org

<https://lists.linux-foundation.org/mailman/listinfo/containers>

---



---

Subject: Re: [PATCH 2/2] dm-ioband: I/O bandwidth controller v0.0.4: Document

Posted by [akpm](#) on Sat, 26 Apr 2008 18:45:35 GMT

[View Forum Message](#) <> [Reply to Message](#)

---

On Thu, 24 Apr 2008 20:22:19 +0900 (JST) Ryo Tsuruta <[ryov@valinux.co.jp](mailto:ryov@valinux.co.jp)> wrote:

```

> +What's dm-ioband all about?
> +
> + dm-ioband is an I/O bandwidth controller implemented as a device-mapper
> + driver. Several jobs using the same physical device have to share the
> + bandwidth of the device. dm-ioband gives bandwidth to each job according
> + to its weight, which each job can set its own value to.
> +
> + At this time, a job is a group of processes with the same pid or pgrp or
> + uid. There is also a plan to make it support cgroup. A job can also be a
> + virtual machine such as KVM or Xen.

```

Most writes are performed by pdflush, kswapd, etc. This will lead to large  
inaccuracy.

It isn't trivial to fix. We'd need deep, long tracking of ownership  
probably all the way up to the pagecache page. The same infrastructure  
would be needed to make Sergey's "BSD acct: disk I/O accounting" vaguely  
accurate. Other proposals need it, but I forget what they are.

Much more minor points: when merge-time comes, the patches should have the  
LINUX\_VERSION\_CODE stuff removed. And probably all of the many `inline's

should be removed.

---

Containers mailing list  
Containers@lists.linux-foundation.org  
<https://lists.linux-foundation.org/mailman/listinfo/containers>

---

Subject: Re: [PATCH 2/2] dm-ioband: I/O bandwidth controller v0.0.4: Document  
Posted by [Hirokazu Takahashi](#) on Mon, 28 Apr 2008 06:49:15 GMT

[View Forum Message](#) <> [Reply to Message](#)

---

Hi,

> > +What's dm-ioband all about?

> > +

> > + dm-ioband is an I/O bandwidth controller implemented as a device-mapper driver. Several jobs using the same physical device have to share the bandwidth of the device. dm-ioband gives bandwidth to each job according to its weight, which each job can set its own value to.

> > +

> > + At this time, a job is a group of processes with the same pid or pgrp or uid. There is also a plan to make it support cgroup. A job can also be a virtual machine such as KVM or Xen.

>

> Most writes are performed by pdflush, kswapd, etc. This will lead to large inaccuracy.

>

> It isn't trivial to fix. We'd need deep, long tracking of ownership

> probably all the way up to the pagecache page. The same infrastructure would be needed to make Sergey's "BSD acct: disk I/O accounting" vaguely accurate. Other proposals need it, but I forget what they are.

I'm working on this topic and I've posted patches once.

<http://lwn.net/Articles/273802/>

The current linux kernel already has the memory subsystem of cgroup.

You can determine which page is owned by which cgroup with it.

I realized we could easily implement "tracking mechanism of block I/O" on the feature of this memory subsystem.

When you have an I/O request, it requires data transfer between a certain page and certain sectors in a disk. This means every I/O requests has a target page, so you can find out the owner of the page using this feature. I think it will be okay to assume that the owner of the page is the owner of the I/O request to the page.

I have a plan on porting the patch to the latest version of linux.  
I'm going to make it general, so not only dm-ioband but also OpenVz  
team and the NEC team, which are working on having the CFQ scheduler  
control the bandwidth, will be able to make use of this feature.

But it will take some time to port it since the code of the memory  
subsystem has been being modified a lot recently.

Thank you,  
Hirokazu Takahashi.

---

Containers mailing list  
Containers@lists.linux-foundation.org  
<https://lists.linux-foundation.org/mailman/listinfo/containers>

---

---

Subject: Re: [PATCH 2/2] dm-ioband: I/O bandwidth controller v0.0.4: Document  
Posted by [Ryo Tsuruta](#) on Mon, 28 Apr 2008 08:06:27 GMT

[View Forum Message](#) <> [Reply to Message](#)

---

Hi,

> Most writes are performed by pdflush, kswapd, etc. This will lead to large  
> inaccuracy.  
>  
> It isn't trivial to fix. We'd need deep, long tracking of ownership  
> probably all the way up to the pagecache page. The same infrastructure  
> would be needed to make Sergey's "BSD acct: disk I/O accounting" vaguely  
> accurate. Other proposals need it, but I forget what they are.

I also realize that some kernel threads such as pdflush perform actual  
writes instead of tasks which originally issued write requests.

So, taka is developing a blocking I/O tracking down mechanism which is  
based on cgroup memory controller and posted it to LKML:

<http://lwn.net/Articles/273802/>

However, the current implementation works well with Xen virtual  
machines, because virtual machine's I/Os are issued from its own kernel  
thread and can be tracked down. Please see a benchmark result of Xen  
virtual machine:

<http://people.valinux.co.jp/~ryov/dm-ioband/benchmark/xen-blktap.html>

As for KVM, dm-ioband was also able to track down block I/Os as I  
expected. When dm-ioband is used in virtual machine environment,  
I think even the current implementation will work fairly.

But unfortunately I found KVM still had a performance problem that  
it couldn't handle I/Os efficiently yet, which should be improved.

I already posted this problem to kvm-devel list:

[http://sourceforge.net/mailarchive/forum.php?thread\\_name=20080229.210531.226799765.ryov%40valinux.co.jp&forum\\_name=kvm-devel](http://sourceforge.net/mailarchive/forum.php?thread_name=20080229.210531.226799765.ryov%40valinux.co.jp&forum_name=kvm-devel)

> Much more minor points: when merge-time comes, the patches should have the  
> LINUX\_VERSION\_CODE stuff removed. And probably all of the many `inline's  
> should be removed.

Thank you for your advice. I'll have these fixes included in the next  
release.

Ryo Tsuruta

---

Containers mailing list

Containers@lists.linux-foundation.org

<https://lists.linux-foundation.org/mailman/listinfo/containers>

---